

## DATASHEET

SPECIFICATIONS OF LUMINARY.	
Luminaries wattage	120 Watt (+/- 5%)
Input Voltage	230 VAC
Input Frequency	50 Hz
Input Current	0.593A
Power Factor	> 0.99
Athd.	CLASS C
Efficiency	91.5%
Temperature Class	T6
IP Standard	IP 65
Total Weight	6 Kg
Starting Time	Instant ( 0.2 Sec)
Light Spreading Angle	60°/90°/120°
Guarantee	3 Years on LED DRIVER
Guarantee	5 Years on COB LED
Guarantee	3 Years on FLUX/CCT/CRI


ORDERING CODE: MFL120MW



SPECIFICATIONS OF LED		MAKE : CITIZEN JAPAN
Model No	CLU-048-1812 V6	
LED type / No of LED Lamp	COB/ Single	
Total Lumen (As per simulation Tool)		15357
Lumen Efficacy (Lm/ Watt)		140 lm/W @ 60° C LED Tc
Lumen Efficacy (Lm/ Watt) (Incl.all losses)		128 lm/W @ 60° C LED Tc
Color / Color Rendering index		CCT 6500K / RA 70
SP Ratio	2.25	2.25
MAC ADAM ELIP STAGE	STEP 3	
LED -Wattage/Current/Voltage	111.1 W / 2000 ma /55.80 V	
Lamp Life	1,60,000 Hours Min.	
Certifications / Reports	LM80/Photo Bio. Test	
Actual Tested Report	Actual Operating test Report for 63,000Hrs	
Identification Method	Unique Serial No. Printed on each Lamp	

**CITIZEN**  
Micro HumanTech


### LED SPECTRUM

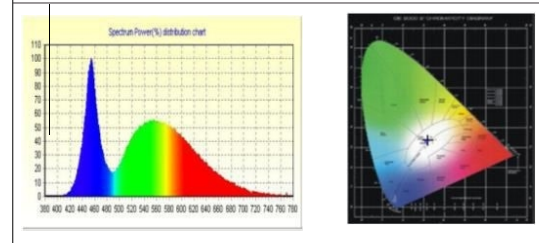

SPECIFICATIONS OF LED DRIVER		MAKE - MEANWELL
Model No	ELG 150 54	
Type of Driver	Constant Current	
Input Voltage Range	100 - 305 VAC, 142 - 431 VDC	
Frequency Range	47 - 63 Hz	
Inrush current	Cold Start 65A	
Leakage current	0.75mA/ 277VAC	
Output Protection	Short Circuit, Over Voltage/ Current/ Temperature	
Withstand Voltage	I/P-O/P : 3.75KVAC	
Surge Protection	Line-Earth 6KV, Line-Line 4KV	
MTBF /DMTBF	313.66 Khrs min	
Capacitor Life Cycle	32869 Hrs @ 60°C	

SPECIFICATIONS OF OPTICS	
Optics Type	Glass Lens
MOC of Optics	Borosilicate Glass
Optics Efficiency	96%

SPECIFICATIONS OF FIXTURE \ HEAT SINK	
Certification	IP 65
MOC Fixture	Aluminum Diecasting Lm6 Grade
Junction Temperature -Tj	86°C
Case Temperature- Tc	60°C

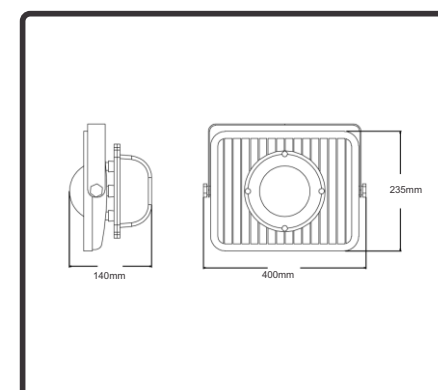

DATASHEET

THERMAL PHOTOGRAPHS



NOTE :

The product & specification may change for improvement without prior information.