


DATASHEET

ORDERING CODE: MFLPSL75MW


SPECIFICATIONS OF LUMINARY.	
Luminaries wattage	75 Watt (+/- 5%)
Input Voltage	230 VAC
Input Frequency	50 Hz
Input Current	0.343A
Power Factor	> 0.96
Athd.	CLASS C
Efficiency	91%
Temperature Class	T6
IP Standard	IP 65
Total Weight	12 Kg Approx.
Starting Time	Instant (0.2 Sec)
Light Spreading Angle	120x60°
Guarantee	3 Years on LED DRIVER
Guarantee	5 Years on COB LED
Guarantee	3 Years on FLUX/CCT/CRI

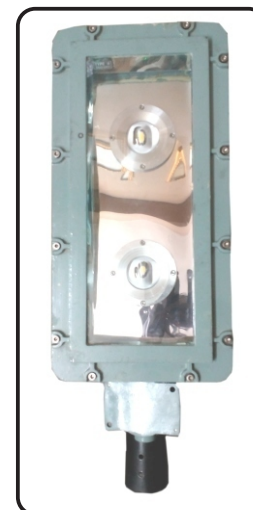

CITIZEN
Micro HumanTech

SPECIFICATIONS OF LED		MAKE : CITIZEN JAPAN
Model No	CLU-038-1206	2Nos V6
LED type / No of LED Lamp	COB/ Single	
Total Lumen (As per simulation Tool)		9804
Lumen Efficacy (Lm/ Watt)		138 lm/W @ 60° C LED Tc
Lumen Efficacy (Lm/ Watt) (Incl. all loses)		130 lm/W @ 60° C LED Tc
Color / Color Rendering index		CCT 6500K / RA 70
SP Ratio	2.25	2.25
MAC ADAM ELIP STAGE	STEP 3	
LED -Wattage/Current/Voltage	70.8 W / 1900 mA /37.3 V	
Lamp Life	1,60,000 Hours Min.	
Certifications / Reports	LM80/Photo Bio. Test	
Actual Tested Report	Actual Operating test Report for 63,000Hrs	
Identification Method	Unique Serial No. Printed on each Lamp	

LED SPECTRUM

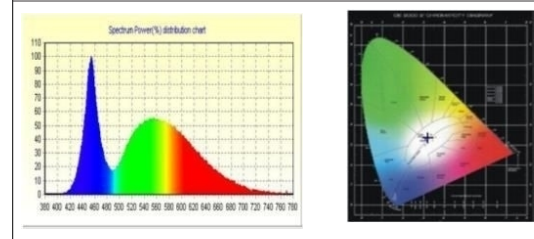

SPECIFICATIONS OF LED DRIVER		MAKE - MEANWELL
Model No	ELG 75 42	
Type of Driver	Constant Current	
Input Voltage Range	100 - 305 VAC	
Frequency Range	47 - 63 Hz	
Inrush current	Cold Start 60A	
Leakage current	0.75mA/ 277VAC	
Output Protection	Short Circuit, Over Voltage/ Current/ Temperature	
Withstand Voltage	I/P-O/P : 3.75KVAC	
Surge Protection	L-N : 4KV, L,N-PE : 6KV	
MTBF /DMTBF	331 Khrs min.	
Capacitor Life Cycle	56870 Hrs @ 60°C	

SPECIFICATIONS OF OPTICS	
Optics Type	Glass Lens
MOC of Optics	Borosilicate Glass
Optics Efficiency	96%

SPECIFICATIONS OF FIXTURE \ HEAT SINK	
Make of Fixture	Sudhir Switch Gear
Certification	IP 65
MOC Fixture	Aluminum Die Casting- LM6
Junction Temperature -Tj	84°C
Case Temperature- Tc	60°C