


## DATASHEET

ORDERING CODE: MFLPCR80MW


SPECIFICATIONS OF LUMINARY.	
Luminaries wattage	80 Watt (+/- 5%)
Input Voltage	230 VAC
Input Frequency	50 Hz
Input Current	0.386A
Power Factor	> 0.95
Athd.	CLASS C
Efficiency	88%
Temperature Class	T6
IP Standard	IP 65
Total Weight	12.5 Kg Approx.
Starting Time	Instant ( 0.2 Sec)
Guarantee	3 Years on LED DRIVER
Guarantee	5 Years on COB LED
Guarantee	3 Years on FLUX/CCT/CRI

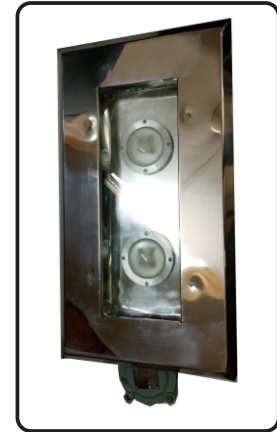

SPECIFICATIONS OF LED		MAKE : CITIZEN JAPAN
Model No	CLU-038-1205 -2Nos V6	
LED type / No of LED Lamp	COB/ Single	
Total Lumen (As per simulation Tool)	9804 lm	
Lumen Efficacy (Lm/ Watt)	138 lm/W @ 60°C LED Tc	
Lumen Efficacy (Lm/ Watt) (Incl. all losses)	122 lm/W @ 60°C LED Tc	
Color / Color Rendering index	CCT 6500K / RA 70	
SP Ratio	2.25	2.25
MAC ADAM ELIP STAGE	STEP 3	
LED -Wattage/Current/Voltage	72 W / 1900 mA /37.4 V	
Lamp Life	1,60,000 Hours Min.	
Certifications / Reports	LM80/Photo Bio. Test	
Actual Tested Report	Actual Operating test Report for 63,000Hrs	
Identification Method	Unique Serial No. Printed on each Lamp	

**CITIZEN**  
 Micro HumanTech

### LED SPECTRUM

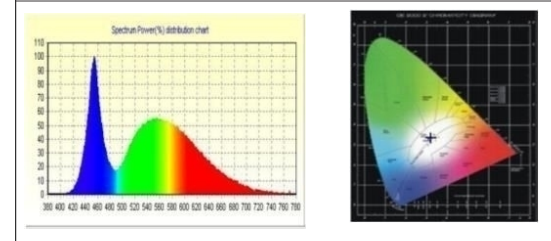

SPECIFICATIONS OF LED DRIVER		MAKE - MEANWELL
Model No	ELG-75-42	
Type of Driver	Constant Current	
Input Voltage Range	200 - 295 VAC	
Frequency Range	47 - 63 Hz	
Inrush current	Cold Start 50A	
Leakage current	0.75mA/ 240VAC	
Output Protection	Short Circuit, Over Voltage/ Current/ Temperature	
Withstand Voltage	I/P-O/P : 3.75KVAC	
Surge Protection	Line-Earth 6KV, Line-Line 4KV	
MTBF /DMTBF	331 Khrs min.	
Capacitor Life Cycle	49694 Hrs @ 50°C	

SPECIFICATIONS OF OPTICS	
Optics Type	Glass Lens
MOC of Optics	Borosilicate Glass Lens
Optics Efficiency	90%(+/-5%)

SPECIFICATIONS OF FIXTURE \ HEAT SINK	
Make of Fixture	Sudhir Switch Gear
Certification	IP 65
MOC Fixture	Aluminum Diecasting-LM6
Junction Temperature -Tj	95°C
Case Temperature- Tc	62.4°C